KRAUSE

Ladders and scaffolding systems




Height-adjustable, mobile working platform


with rail cage (based on DIN EN ISO 14122)

QUALITY Since 1900

Height-adjustable, mobile **working platform** with rail cage




Cantilevered railing cage with knee rail and lowerable toe boards
Size approx. 2,635 x 5,000 mm



Railing locks automatically into place when folded-out




Height-adjustable rail cage from approx. 815 – 1,100 mm



Lowerable toe boards



Rubberised impact protection




Centrally height-adjustable with rack and crank




Two front-end handles on each end for easy movement



Vertical platform height adjustable **from 2,700 – 3,700 mm**

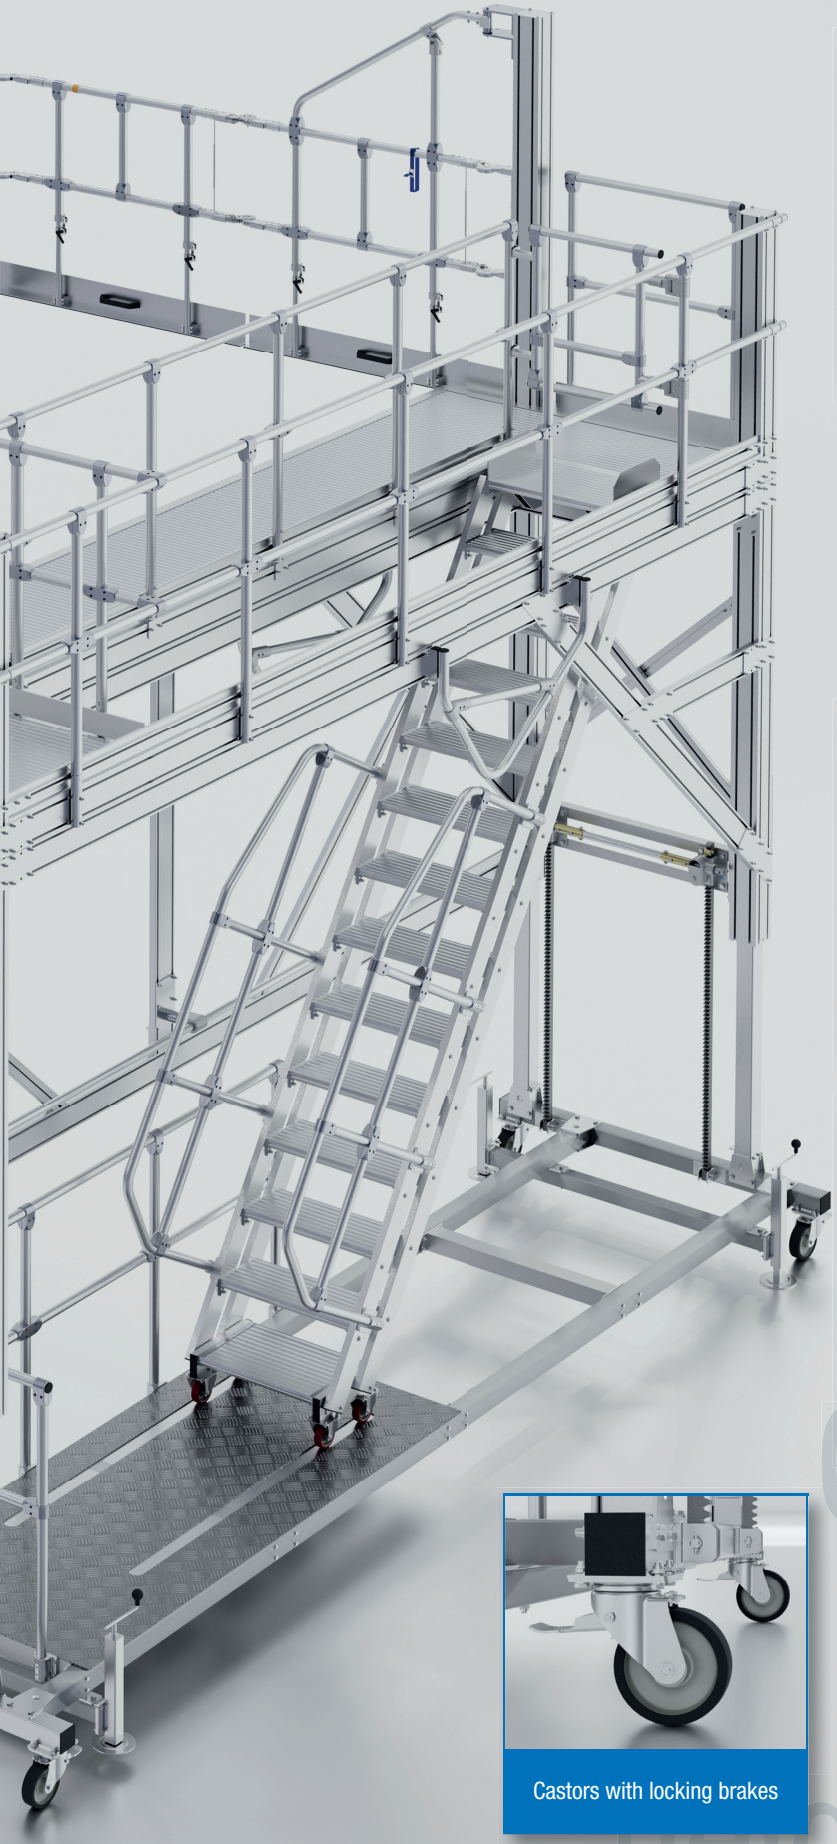




Platform surface at the top aluminium corrugated, size approx. 1,540 x 5,000 mm



Swing door at the top end of the staircase




Towed staircase with double castors and guiding rails



Double-sided railing with handrail and knee rail




Bottom platform surface made of chequer plate




Step size approx. 600 x 225 mm

Castors with locking brakes



Spindle feet for levelling out unevenness

Height-adjustable, mobile working platform with rail cage (based on DIN EN ISO 14122)

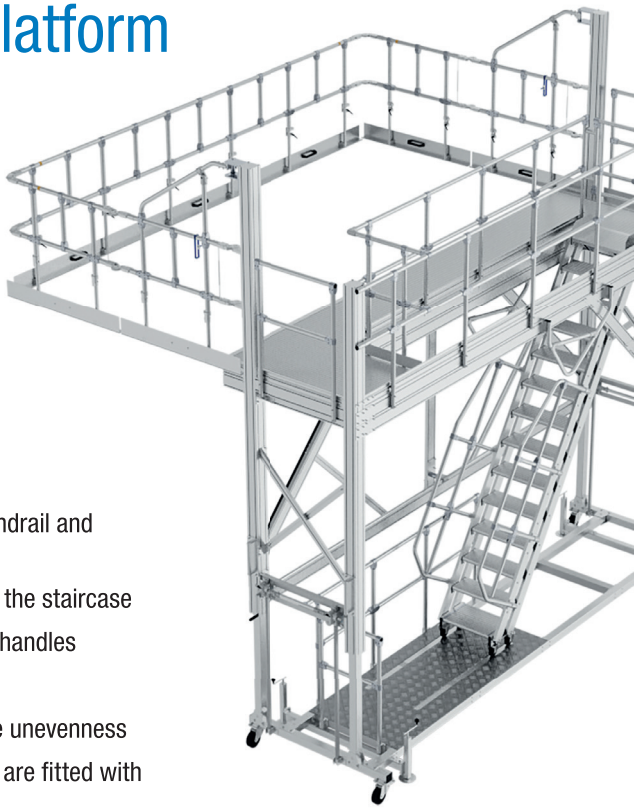

Safe working area for maintenance, repair and replacement of technical equipment on the roofs of buses and other commercial vehicles.

+ Platform height adjustable with crank from approx. 2,700 - 3,700 mm
+ Height adjustment optionally possible electrically or using a cordless screwdriver
+ Total load 300 kg
+ Max. step load 150 kg
+ Upper platform with rubberised impact protection
+ Platform size approx. 1,540 x 5,000 mm, surface aluminium corrugated
+ Fold-out guardrail cage, size approx. 2,635 x 5,000 mm
+ Railing cage with lowerable toe boards, height-adjustable from approx. 815 – 1,100 mm
+ Bottom platform surface made of chequered plate
+ Towed staircase with double castors and guiding rails
+ Aluminium corrugated steps, size approx. 600 x 225 mm
+ Double-sided railing with handrail and knee rail
+ Swing door at the top end of the staircase
+ Easy to move thanks to four handles
+ Castors with locking brakes
+ 4 spindle feet to compensate unevenness
+ All external screws and nuts are fitted with plastic covering caps

Art.-No. CS-25-001743-1-1
Total weight approx. 1,106 kg



Art.-No. CS-25-001881-2-0
Total weight approx. 1,546 kg

Also available as version with **double-sided** railing cage.

Please do not hesitate to contact us and get more information about our special service for customised solutions made of aluminium.

We will be happy to advise you personally:

+49 (0) 66 31 / 795 - 0

Visit us on the Internet:
www.krause-systems.com

© 2025 by KRAUSE-Werk D-36304 Alsfeld.